DURACELL Rechargeable

PPSOGC

Charge Sizes: Dual USB Devices

On-The-Go USB Charger for Mobile Devices

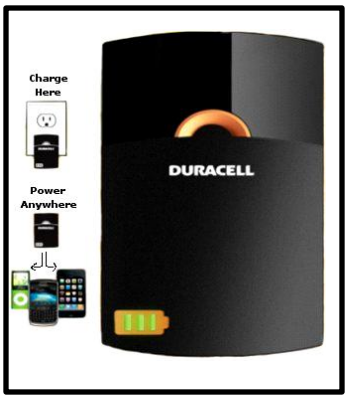

Technical

Plug:	Class 2, Integrated Power Supply Direct Plug-In Matches Local Requirements
Battery Type/Fit:	Lithium-polymer; 3.7V (1800mAh)
Typical Weight:	92 g
Input:	100-240V AC, 50-60 Hz
Output:	2 USB Outputs; 5V each, total 1A divided by both channels
Operating Temp:	5°C – 35°C
Dimensions:	100 mm (L) x 58 mm (W) x 20 mm (H)

BENEFITS

Conveniently Charged Via AC Outlet
Portable Extra Power to Mobile Devices

FEATURES

Internal Lithium-polymer Battery; 1800mAh
High energy density
Smart Feature
- Automatic Turn On/Off without switches
- Smart battery fuel gauge (light mechanism) – Push to Test

Dual USB output
Micro USB cable and micro to mini adaptor included
2 USB charge ports
Charges Apple devices, but separate Apple cable required
International Charge Capability- device can be used worldwide with suitable converter plug

SAFETY

Battery Protection Circuit
- Over voltage and under voltage
- Output overload Protection

DURACELL BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Tel: Toll free 1.800.544.5454
Web: www.duracell.com

*Charge rate and time is dependent on cell capacity, discharge state, and operating temperature.

Information and contents in this data sheet are for reference purposes only. They do not constitute any warranty and representation is subject to change without notice. For most current information and further details, please contact Duracell.